

## HS-2600FT-TAB-O SERIES



Materials




Sprockets



Applications

**Plate Materials:** POM-DP, POM-LF

**Pin Material:** Cold rolled austenitic stainless steel

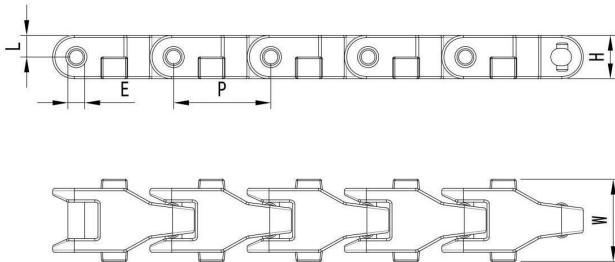

Dimension	mm	inches
<b>P</b>	63.5	2.480
<b>M</b>	23.3	0.917
<b>W</b>	54.0	2.126
<b>H</b>	28.4	1.122
<b>E</b>	11.0	0.433
<b>L</b>	14.3	0.563

HS-2600FT-TAB-O (Side Flexing Case Conveyor Chains)

### CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-2600FT-TAB-O	54.0	2.13	2100	472	200	7.87	40	1.57	1.54