

## HS-880 SERIES



Materials





Sprockets



Applications

**Plate Materials:** POM-DP,POM-LF

**Pin Material:** Cold rolled austenitic stainless steel

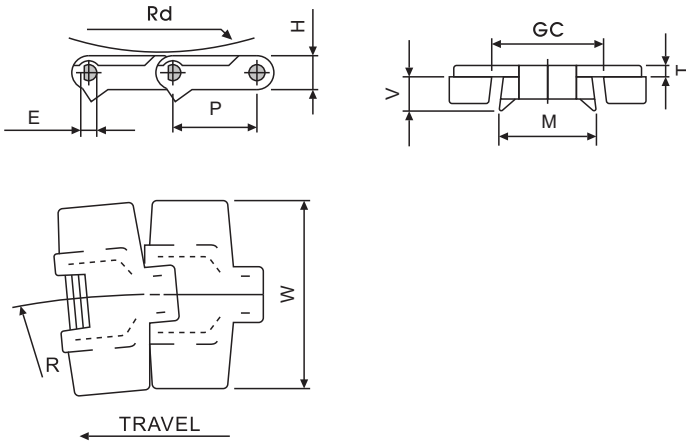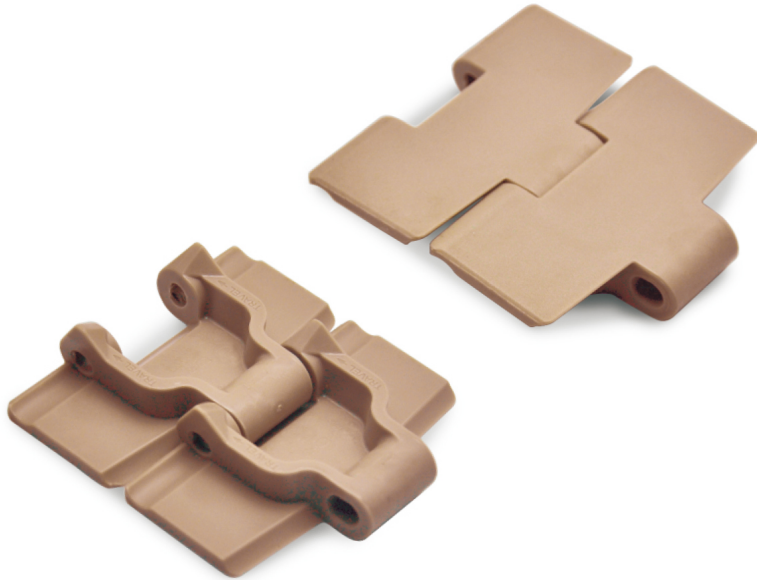

Dimension	mm	inches
P	38.1	1.500
R	400.0	15.748
W	-	-
H	20.0	0.787
T	4.0	0.157
E	7.1	0.280
M	42.9	1.689
V	16.0	0.630
RD	40.0	1.575
GC(Straight)	44.5	1.752
GC(Curve)	41.4	1.630

### HS-880 (Side Flexing Plastic Chain)

#### CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-880-K325	82.6	3.25	2100	472	457	18.00	40	1.57	0.89
HS-880-K350	88.9	3.50	2100	472	457	18.00	40	1.57	0.96
HS-880-K450	114.3	4.50	2100	472	457	18.00	40	1.57	1.04
HS-880-K750	190.5	7.50	2100	472	457	18.00	40	1.57	1.74