

## HS-882 SERIES



Materials







Sprockets



Applications

**Plate Materials:** POM-DP, POM-LF

**Pin Material:** Cold rolled austenitic stainless steel

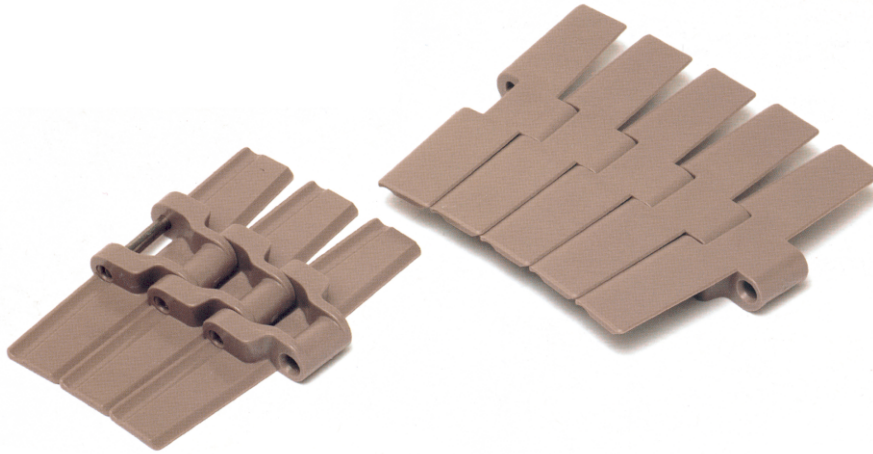

Dimension	mm	inches
P	38.1	1.500
R	610.0	24.016
W	-	-
H	22.3	0.878
T	4.8	0.189
E	8.7	0.343
M	61.1	2.406
F	9.5	0.374
V	17.5	0.689
RD	40.0	1.574
GC(Straight)	61.9	2.437
GC(Curve)	58.0	2.283

### HS-882 (Side Flexing Plastic Chain)

#### CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-882-K450	114.5	4.50	3830	860	610	24.00	40	1.575	1.94
HS-882-K750	190.5	7.50	3830	860	610	24.00	40	1.575	2.38
HS-882-K1000	254.0	10.00	3830	860	610	24.00	40	1.575	2.83
HS-882-K1200	304.8	12.00	3830	860	610	24.00	40	1.575	2.95