

HS-882TAB-EL SERIES



Materials







Sprockets



Applications

Plate Materials: POM-DP, POM-LF

Pin Material: Cold rolled austenitic stainless steel

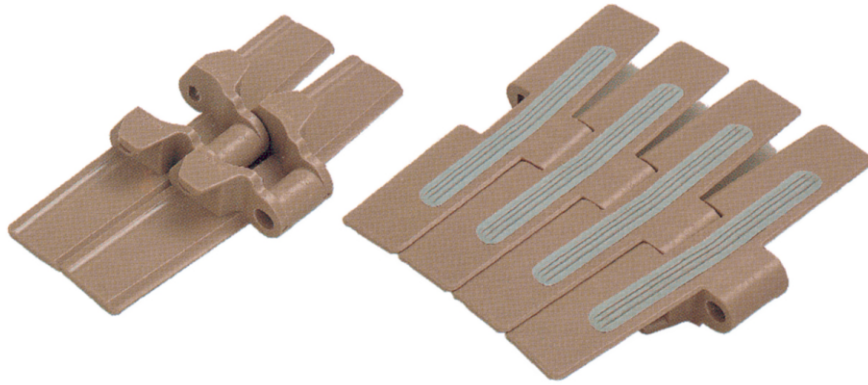

Dimension	mm	inches
P	38.1	1.500
W	-	-
E	8.7	0.343
T	4.0	0.157
F	9.5	0.374
M	57.2	2.252
N	76.2	3.000
D	2.0	0.079
L	11.0	0.433
H	27.0	1.063
R	610.0	24.016
S	17.0	0.670
RD	40.0	1.575
GC(Straight)	60.0	2.362
GC(Curve)	58.2	2.283

B:132.0/195.0/246.0

HS-882TAB-EL (Side Flexing Plastic Chain)

CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-882TAB-K750-EL	190.5	7.50	3830	860	610	24.00	40	1.575	2.43
HS-882TAB-K1000-EL	254.0	10.00	3830	860	610	24.00	40	1.575	2.87
HS-882TAB-K1200-EL	304.8	12.00	3830	860	610	24.00	40	1.575	3.41